




>>> 研發中



產品特色

- 最新國際 IEC/UL 62368-1 安規認證標準
- PMbus 數位管理功能
- 寬溫設計 -20~+70°C
- 節能設計效率高達 90%
- 1+1 備援/熱插拔設計
- 智能自動溫控風扇設計與低噪音設計
- 全機採用日製電容器大幅提昇電源可靠度



產品規格





型號		TG24-0250-01
輸出	額定輸出電功率	250 W
	降額輸出電功率	125W@50% Load, 70°C
	輸出直流電壓	12 Vdc
	最大輸出電流	20.84 A
	過電流限制	≤ 28 A
	最小輸出電流	0 A
	漣波 & 雜訊	≤ 1 %
	停電後輸出維持時間	≥ 10 ms @80% Load, 115Vac/60Hz, 25°C
輸入	輸入電壓範圍	90~264 Vac
	輸入頻率範圍	47~63 Hz
	功率因數 PF	≥ 0.95 @100% Load, 115Vac/60Hz
	效率	≥ 90 % @50% Load, 230Vac/50Hz, 25°C
	湧浪電流	≤ 30 A @115Vac/60Hz, 25°C ; ≤ 60 A @230Vac/50Hz, 25°C
電磁兼容	雷擊保護	4KV (L/N-G), 2KV (L-N)
	電磁波干擾 EMI	EN55032
	靜電防護 ESD	IEC61000-4-2
環境	操作溫度	-20~+70 °C
	貯藏溫度	-40~+80 °C
	操作濕度	20~80 %RH
	貯藏濕度	5~95 %RH
	適用海拔高度範圍	5,000 m
其它	尺寸 (W x L x H)	73.5 x 185 x 40 mm (2.89 x 7.28 x 1.57 inch) ; 1U
	平均無故障時間 MTBF	≥ 300,000 hours
	認證	Meets CB, TÜV, UL/cUL

*規格修改不另行通知

WN20240624



- 網通產業

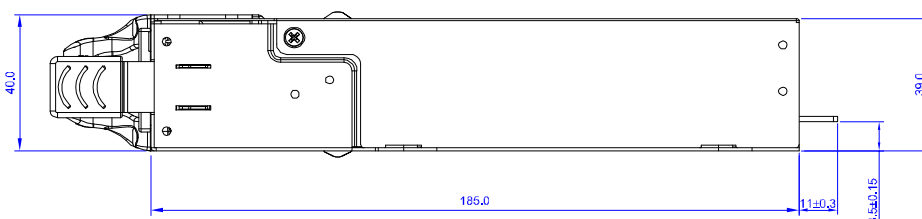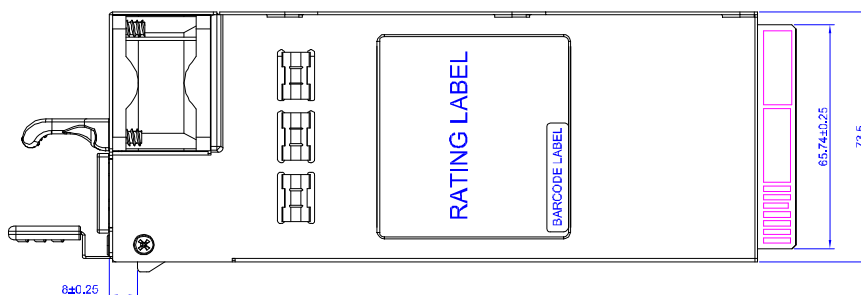

Unit: mm

電話:(02)2657-2191 傳真:(02)2657-8798 電子信箱: sales@tigerpower.com

WN20240624

