



>>> Developing



KEY FEATURES

- Complies with IEC/UL 62368-1 standard
- Meets IEEE 802.3af/at/bt PSE requirements
- 4"x6"x1.33" with low profile size
- High efficiency (more than 92%)
- Two power supplies in parallel provide up to 1,170W
- 1+1 redundancy design with current sharing
- Exclusive design prolongs capacitor lifetime (≥ 3 yrs.)



SPECIFICATION

Model Name		TN24-0650-01	
Output	Rated Power	650 W (with 22.2 CFM fan x 2)	
	Derating Power	325W@70°C (Derate linearly from 100% load at +50°C to 50% load at +70°C)	
	Output Voltage	12 Vdc	54 Vdc
	Maximum Output Current	8.34 A	10.19 A
	Over Current Limit	9.0~12.5 A	11.2~16.8A
	Minimum Output Current	0 A	0 A
	Ripple & Noise	$\leq 1\%$	
	Hold Up Time	≥ 10 ms @80% Load, 100Vac	
Input	Input Voltage	90~264 Vac	
	Input Frequency	47~63 Hz	
	Power Factor	≥ 0.98 @100% Load, 100Vac/60Hz	
	Efficiency	$\geq 92\%$ @100% Load, 230Vac/50Hz	
	Inrush Current	≤ 40 A @100% Load, 100Vac, 25°C ; ≤ 100 A @100% Load, 240Vac, 25°C	
EMC	Surge	4KV (L/N-G), 2KV (L-N)	
	EMI	EN55032	
	ESD	IEC61000-4-2	
Environmental	Operating Temperature	-20~+70 °C	
	Storage Temperature	-40~+80 °C	
	Operating Humidity	10~90 %RH	
	Storage Humidity	5~95 %RH	
	Operating Altitude	5,000 m	
Others	Dimension (W x L x H)	101.6 x 152.4 x 33.8 mm (4 x 6 x 1.33 inch) *The height excludes PCB thickness	
	Mean Time Between Failures	$\geq 900,000$ hours @100Vac/60Hz, 25°C	
	Certifications	CB, UL/cUL	

*Specifications are subject to change without notice

CS20240604



APPLICATION

- PoE Switch




- IP-PBX



- Industrial



MECHANICAL SPECIFICATION

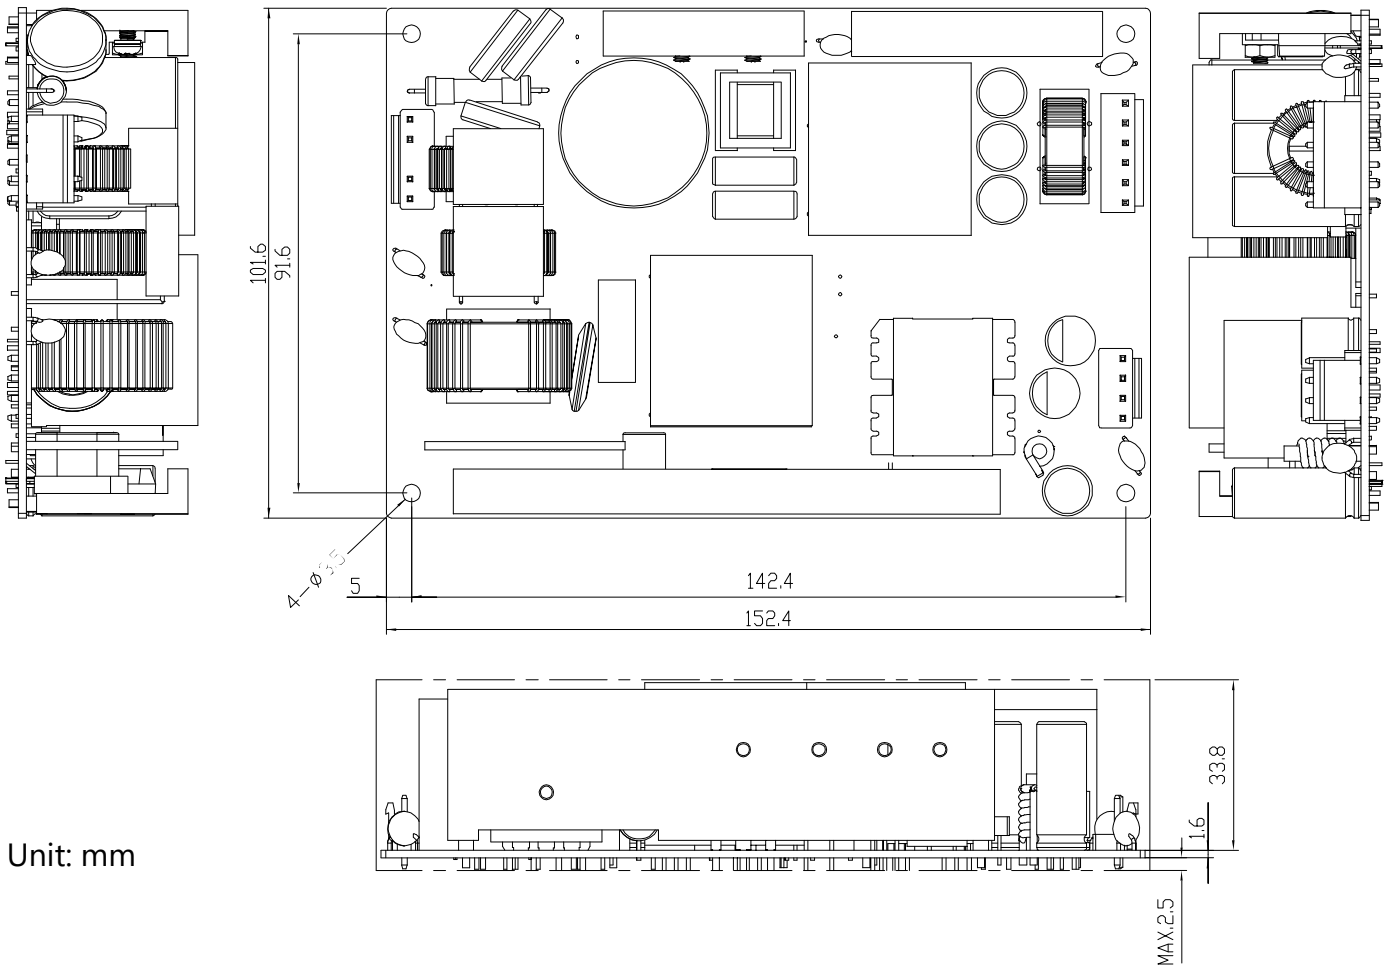

LEAD YEAR ENTERPRISE CO., LTD.

2F No.618 RuiGuang Road, NeiHu District, Taipei, Taiwan 11492

Tel: +886-2-2657-2191

Fax: +886-2-2657-8798

Email: sales@tigerpower.com

CS20240604

